TRAFFIC CONTROL PLAN

THIS ROAD WILL BE CLOSED TO THROUGH TRAFFIC DURING CONSTRUCTION. LOCAL TRAFFIC TO ADJACENT PROPERTIES WILL BE MAINTAINED AS PROVIDED FOR IN ARTICLE 1107.08 OF THE CURRENT STANDARD SPECIFICATIONS. TRAFFIC CONTROL DEVICES, PROCEDURES, LAYOUTS, SIGNING, AND PAVEMENT MARKINGS INSTALLED WITHIN THE LIMITS OF THIS PROJECT SHALL CONFORM TO THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS, AS ADOPTED BY THE DEPARTMENT PER 761 OF THE IOWA ADMINISTRATIVE CODE (AC), CHAPTER 130."

281-1 10-18-16

SECTION 404 PERMIT AND CONDITIONS

CONSTRUCT THIS PROJECT ACCORDING TO THE REQUIREMENTS OF U.S. ARMY CORPS OF ENGINEERS NATIONWIDE PERMIT NO. 14, PERMIT NO. CEMYR-OD-P-2017-0945. A COPY OF THIS PERMIT IS AVAILABLE FROM THE IOWA DOT WEBSITE (HTTP://WWW.ENVPERMITS.IOWADOT.GOV/). THE U.S. ARMY CORPS OF ENGINEERS RESERVES THE RIGHT TO VISIT THE SITE WITHOUT PRIOR NOTICE.

DRAWING APPROVAL

ALL SHOP DRAWINGS THAT REQUIRE APPROVAL SHALL BE APPROVED BY THE CRAWFORD COUNTY ENGINEER.

ADDRESS:


1202 BROADWAY, STE. 1 DENISON, IOWA 51442-0458


TELEPHONE: (712)263-2449

EMAIL: passman@crawfordcounty.org

THESE SHOP DRAWINGS SHALL NOT BE SENT TO IOWA D.O.T. OFFICE OF RRIDGE DESIGN

STA. 7+86
PROPOSED TWIN 12'x12'x46' RCB CULVERT
3' SKEW LT. AHEAD —
B.O.P. STA. 6+75
E.O.P. STA. 9+50





@IOWADOT

Highway Division


PLANS OF PROPOSED IMPROVEMENTS ON THE

SECONDARY ROAD SYSTEM CRAWFORD COUNTY

PROJECT NO. BROS-C024(120)--8J-24
RCB CULVERT REPLACEMENT - TWIN BOX
G AVENUE: EAST OF 255TH ST.

SCALES: AS NOTED

REFER TO THE PROPOSAL FORM FOR LIST OF APPLICABLE SPECIFICATIONS.

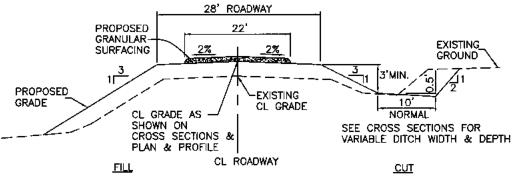

101-

V.P.D.

V.P.D.

V.P.H.

%

25

35

Х

TYPICAL CROSS SECTION NOT TO SCALE

UTILITY CONTACTS

WINDSTREAM COMMUNICATONS
Jael Schroeder
Phone: 800–289–1901
Email: locate.desk@windstream.com

WEST CENTRAL IOWA RURAL WATER Jean Hargens Phone: 712-655-2534 Email: wcirwa@pionet.net

NORTHWEST IOWA POWER COOPERATIVE Steve Harringa Phone: 712-539-1612 PROJECT IDENTIFICATION NUMBER

TOTAL SHEETS
17

PROJECT NUMBER

BROS-C024(120)--8J-24

R.O.W. PROJECT NUMBER


FHWA STRUCTURE NO. 129000


	INDEX OF SHEETS											
NO.	DESCRIPTION											
A1	TITLE SHEET											
C1	ESTIMATED PROJECT QUANTITIES											
C1-2	ESTIMATED REFERENCE INFORMATION											
C3-4	TABULATIONS											
C5	POLLUTION PREVENTION PLAN											
G1	DETAILS OF REFERENCE INFORMATION											
H1	RIGHT-OF-WAY SHEET											
Q1	SOILS SHEET											
U1	DETAIL SHEET											
V1	SITUATION PLAN											
V2	ROADWAY PIPE CULVERT											
W1-3	CROSS SECTIONS - ROADWAY											
Z1-2	CROSS SECTIONS - CHANNEL											


STANDARD ROAD PLANS STANDARD ROAD PLANS ARE LISTED ON PLAN

STANDARD ROAD PLANS ARE LISTED ON PLAN SHEET C3.

STANDARD BRIDGE PLANS
STANDARD BRIDGE PLANS ARE LISTED ON PLAN
SHEET C3.



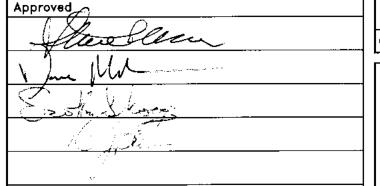



CRAWFORD COUNTY ENGINEER DATE



Approved

I HEREBY CERTIFY THAT THIS ENGINEERING DOCUMENT WAS PREPARED BY ME OR UNDER MY DIRECT PERSONAL SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF IOWA.

TROY C GROOM, P.E. #14450 10/13/17

MY LICENSE RENEWAL DATE IS DECEMBER 31, 2017.

PAGES OR SHEETS COVERED BY THIS SEAL: ALL EXCEPT O1

DESIGN TEAM: TJG/TKK

S SUNDQUIST

120 S. MAIN, F.O. BOX 220, DEN SON, 10WA 51442

FHONE: (712)263-8118 FAX: (712)263-2181

SUNDQUISTENGINEERING, CON

ENGLISH

SCALE IN MILES

SE PROJECT NO.: 02517

FHWA NO. 129000

1-800-292-8989

DESIGN DATA RURAL

04-30-02

2012 AADT

2038 AADT

201X DHV

DESIGN ESALs

TRUCKS

TOTAL

CRAWFORD COUNTY

BOARD OF SUPERVISORS

PROJECT NUMBER - BROS-C024(120)--8J-24

SHEET NUMBER AT

	<u> </u>	ESTIMATED PROJECT QUANTITIES			100-1A 07-15-97			ESTIMATE REFERENCE INFORMATION 100-4A 10-29-02
ITEM NO.	ITEM CODE	ПЕМ	UNIT	TOTAL	AS BUILT QTY.	Item No.	Item Code	Description
1 2 3 4 5 6	2102-0425071 2102-2710070 2104-2710020 2107-0425020 2113-0001100 2312-8260051 2401-6745625	EXCAVATION, CLASS 10, CHANNEL COMPACTING BACKFILL ADJACENT TO BRIDGES, CULVERTS OR STRUCTURES SUBGRADE STABILIZATION MATERIAL, POLYMER GRID GRANULAR SURFACING ON ROAD, CLASS A CRUSHED STONE		61.5 2413.8 1718.5 81.8 342.0 121.4		8	2402-2720000	CONTRACTOR SHALL NOTIFY THE IOWA DNR WITH THE "ASBESTOS NOTIFICATION OF BRIDGE DEMOLITION AND RENOVATION" FORM. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY COSTS ASSOCIATED WITH THIS PROCESS. EXCAVATION. CLASS 20 EXCAVATION TO THE LIMITS DETAILED ON PLAN SHEET U1 IS FOR PAY QUANTITIES ONLY. EXCESS MATERIAL AND UNSUITABLE SOILS SHALL BE HAULED FROM THE SITE AND DISPOSED OF BY THE CONTRACTOR. THE COST OF HAULING AND DISPOSING OF THIS MATERIAL SHALL BE INCLUDED IN AND CONSIDERED INCIDENTAL TO THE PRICE BID FOR CLASS 20 EXCAVATION.
8 9 10 11 12 13 14 15	2507-3250005	EXCAVATION, CLASS 20 EXCAVATION, CLASS 20, FOR ROADWAY PIPE CULVERT FOUNDATION TREATMENT MATERIAL STRUCTURAL CONCRETE (RCB CULVERT) REINFORCING STEEL CULVERT, CORRUGATED METAL ROADWAY PIPE, 24 IN. DIA. PILES, STEEL SHEET ENGINEERING FABRIC REVETMENT, CLASS B	CY CY TON CY LB LF SF SY	1188 130 206.3 323.1 45886 60 720 1161.2				PRIOR TO CONSTRUCTION OF THE RCB CULVERT, BACKFILL OF THE CLASS 20 EXCAVATION WITH FOUNDATION TREATMENT MATERIAL AND SPECIAL BACKFILL SHALL BE COMPLETED THROUGHOUT THE ENTIRE CROSS SECTION TO AN ELEVATION AT OR ABOVE THE BOTTOM OF THE CULVERT FLOOR. ITEM SHALL INCLUDE ALL WORK IN CONJUNCTION WITH THE REMOVAL OF SURFACE WATER AND GROUND WATER AS NEEDED TO PERFORM THE REQUIRED CONSTRUCTION. THIS WORK SHALL INCLUDE (1) BUILDING AND MAINTAINING ALL NECESSARY TEMPORARY IMPOUNDING WORKS, CHANNELS AND DIVERSIONS, (2) FURNISHING, INSTALLING AND OPERATING ALL NECESSARY PUMPS, PIPING AND OTHER FACILITIES AND EQUIPMENT, AND (3) REMOVING ALL SUCH
17 18 19 20 21 22	2507-6800061 2518-6910000 2526-8285000 2528-8445110 2533-4980005 2602-0000020	REVETMENT, CLASS E SAFETY CLOSURE CONSTRUCTION SURVEY TRAFFIC CONTROL MOBILIZATION SILT FENCE	TON EACH LS LS LS LS LF	210.8 2 1 1 1 825.0		9	2402-2720100 2402-2725005	TEMPORARY WORKS AND EQUIPMENT AFTER THEY HAVE SERVED THEIR PURPOSES. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THE NATURE AND EXTENT OF DEWATERING REQUIRED TO COMPLETE THE PROPOSED WORK. EXCAVATION. CLASS 20. FOR ROADWAY PIPE CULVERT REFER TO TAB. 104-3. FOUNDATION TREATMENT MATERIAL
23 24	2602-0010010 2602-0010010	SILT FENCE FOR DITCH CHECKS MOBILIZATIONS, EROSION CONTROL ESTIMATE REFERENCE INFORMATION Description	LF EACH	30.0	100-4A 10-29-02			REFER TO DETAILS ON PLAN SHEET U1. USE AGGREGATE THAT MEETS THE REQUIREMENTS OF SECTION 4122 FOR MACADAM STONE BASE. REMOVAL OF UNSUITABLE OR UNSTABLE SOIL AND PLACEMENT OF FOUNDATION TREATMENT MATERIAL SHALL BE IN ACCORDANCE WITH ARTICLE 2402.03, C, 3, OF THE STANDARD SPECIFICATIONS. MATERIAL ORDERED PLACED BY THE ENGINEER WILL BE MEASURED IN TONS TO THE NEAREST 0.1 TONS. PAYMENT WILL BE AT THE CONTRACT UNIT PRICE PER TON. NO ADJUSTMENT IN UNIT PRICE WILL BE ALLOWED FOR DEVIATION BETWEEN PLAN QUANTITY AND ACTUAL QUANTITY PLACED.
Item No.	Item Code 2102-0425071	SPECIAL BACKFILL		· ;		11	2403-0100020	STRUCTURAL CONCRETE (RCB CULVERT) REFER TO TABULATION ON PLAN SHEET C3 FOR CONCRETE PLACEMENT QUANTITIES. ITEM INCLUDES CERTIFIED PLANT INSPECTION IN ACCORDANCE WITH SECTION 2521 OF THE STANDARD SPECIFICATIONS.
		REFER TO DETAILS ON PLAN SHEET U1. AGGREGATE TYPE SHALL BE CRU GRAVEL OR RAP WILL BE ALLOWED.	NOHED LIMES	SIONE OR CRU	SHED P.C.C. NO	12	2404-7775000	REINFORCING STEEL REFER TO TABULATION ON PLAN SHEET C3 FOR STEEL PLACEMENT QUANTITIES.
2	2102-2710070	EXCAVATION, CLASS 10, ROADWAY AND BORROW INCLUDES 452.1 C.Y. CUT, 2413.8 C.Y. FILL +35% SHRINK, AND 1961.7 EARTHWORK QUANTITIES ON PLAN SHEET C3. TYPE A COMPACTION WILL FROM SUITABLE CLASS 20 AND CLASS 10 CHANNEL EXCAVATION. CONTRANECESSARY BORROW. NO PAYMENT FOR OVERHAUL WILL BE ALLOWED. EXISTING SLOPES THAT ARE TO RECEIVE EMBANKMENT, REGARDLESS OF THE	BE REQUIREI ACTOR SHALI HEIR HEIGHT	D. BORROW M L PROVIDE ADI	MAY BE OBTAINED DITIONAL	13	2417-1060024	CULVERT, CORRUGATED METAL ROADWAY PIPE, 24 IN. DIA. ALL METAL PIPE SHALL BE RIVETED PIPE WITH ANNULAR CORRUGATIONS, ALL BANDS SHALL HAVE ANNULAR CORRUGATIONS AND SHALL BE THE SAME THICKNESS AS THE PIPE, BANDWIDTHS SHALL BE IN ACCORDANCE WITH MATERIALS I.M. 441 EXCEPT THAT NO BAND SHALL BE LESS THAN 24 INCHES IN WIDTH, SPIRAL PIPE WILL NOT BE ALLOWED.
		ACCORDANCE WITH ARTICLE 2107.03, C, 2, OF THE STANDARD SPECIFICATION A SUFFICIENT VOLUME OF SOIL HIGH IN ORGANIC CONTENT IS AVAILABLE OF PROJECT. THIS MATERIAL SHALL BE DEPOSITED AS THE FINAL LAYER TO ON THE PROPOSED ROADWAY FORESLOPES AND OTHER DISTURBED AREAS.	WITHIN THE	FINISHED DEPT	TH OF 4 INCHES	14	2501-5775000	PILES. STEEL SHEET SHALL BE 5 GAGE STEEL SHEETING WITH A MINIMUM SECTION MODULUS OF 3.3 CUBIC INCHES PER FOOT. REFER TO DETAILS ON PLAN SHEET U1.
		PERMANENT VEGETATIVE COVER. THIS WORK SHALL BE CONSIDERED INCID ANY CLEARING AND GRUBBING NECESSARY TO COMPLETE THE WORK ON T CONSIDERED INCIDENTAL TO THIS ITEM.	ENTAL TO T	HIS BID ITEM.		15	2507-3250005	ENGINEERING FABRIC ITEM INCLUDES 745.2 S.Y. OF ENGINEERING FABRIC PLACED ON THE BOTTOM, TOP, ENDS AND SIDES OF THE FOUNDATION TREATMENT MATERIAL. REFER TO DETAILS ON PLAN SHEET U1. ENGINEERING FABRIC FOR THIS PURPOSE SHALL BE MIRAFI 500X, GEOTEX 200ST, CONTECH C200, OR APPROVED EQUAL.
3	2104-2710020	PAYMENT FOR THIS ITEM WILL BE AT PLAN QUANTITY. CROSS SECTIONS VECTOR THE PURPOSE OF DETERMINING ACTUAL QUANTITIES. EXCAVATION, CLASS 10, CHANNEL INCLUDES 1718.5 C.Y. CUT, 146.6 C.Y. FILL + 35% SHRINK, AND 1571.9	C.Y. WASTE	. EXCESS MA	iterial and			ITEM INCLUDES 159.0 S.Y. OF ENGINEERING FABRIC PLACED ON THE BOTTOM, ENDS AND SIDES OF CLASS B REVETMENT. REFER TO DETAILS ON PLAN SHEET U1. ITEM INCLUDES 257.0 SY OF ENGINEERING FABRIC TO BE PLACED UNDER ROCK FLUME. REFER TO DETAILS ON PLAN SHEET C4. ENGINEERING FABRIC FOR THESE PURPOSES SHALL BE MATERIAL AS SPECIFIED FOR EMBANKMENT EROSION CONTROL IN ACCORDANCE WITH ARTICLE 4196.01, B, 3, OF THE STANDARD SPECIFICATIONS.
		UNSUITABLE MATERIAL NOT DESIRABLE TO BE INCORPORATED INTO THE WO BECOME THE PROPERTY OF THE CONTRACTOR AND SHALL BE HAULED FRO DISPOSING OF THIS MATERIAL SHALL BE INCLUDED IN AND CONSIDERED IN 10 CHANNEL EXCAVATION. NO PAYMENT FOR OVERHAUL WILL BE ALLOWED	OM THE SITE NCIDENTAL TO	. THE COST	OF HAULING AND			MATERIAL SHALL BE JOINED BY OVERLAPPING A MINIMUM OF 18 INCHES. THE QUANTITY OF ENGINEERING FABRIC FOR WHICH PAYMENT WILL BE MADE, WHEN PLACED AS DETAILED IN THE CONTRACT DOCUMENTS, WILL BE THE QUANTITY SHOWN IN THE CONTRACT DOCUMENTS IN SQUARE YARDS. MATERIAL FOR LAPS IS NOT INCLUDED IN THE PLAN QUANTITY.
	QUANTITY INCLUDES EXCAVATION REQUIRED TO INSTALL REVETMENT. QUANTIT TRANSITION PROPOSED CHANNEL SLOPES INTO EXISTING SLOPES WITHIN THE PAYMENT FOR THIS ITEM WILL BE AT PLAN QUANTITY. CROSS SECTIONS WI		HE LIMITS S	HOWN ON PLA	N SHEET V1.	16 17	2507-6800021 2507-6800061	REVETMENT. CLASS B REVETMENT. CLASS E THESE ITEMS SHALL CONSIST OF FURNISHING AND PLACING REVETMENT STONE, COMPLETE IN PLACE AS SHOWN ON THE DRAWINGS. REFER TO DETAILS ON PLAN SHEETS C4 AND U1.
5	2113-0001100	FOR THE PURPOSE OF DETERMINING ACTUAL QUANTITIES, SUBGRADE STABILIZATION MATERIAL, POLYMER GRID						DEWATERING REQUIRED TO INSTALL REVETMENT SHALL BE INCLUDED IN AND CONSIDERED INCIDENTAL TO THE PRICE BID FOR THIS ITEM.
6	2312-8260051	REFER TO DETAILS ON PLAN SHEET U1. GRANULAR SURFACING ON ROAD, CLASS A CRUSHED STONE MATERIAL SHALL BE SPREAD BY THE CONTRACTOR AND THE CONTRACT UN COST OF SPREADING GRANULAR SURFACING ON ROADWAY SURFACE. RATE						THE CONTRACTOR WILL BE RESPONSIBLE FOR REMOVAL OF ALL REMNANTS OF REVETMENT STOCKPILES FROM FARM FIELDS UTILIZED BY CONTRACTOR IN THE PROJECT AREA. THIS WORK SHALL BE INCLUDED IN AND CONSIDERED INCIDENTAL TO THE PRICE BID FOR THIS ITEM.
7	2401-6745625	PER MILE. REMOVAL OF EXISTING BRIDGE CONTRACTOR SHALL COORDINATE WITH COUNTY FOR REMOVAL OF TIMBER THESE MATERIALS SHALL BE REMOVED BY COUNTY FORCES AND REMAIN T REMAINDER OF THE STRUCTURE SHALL BE REMOVED AND DISPOSED OF BY	THE PROPER	TY OF THE CO				ITEM INCLUDES REMOVAL OF EXISTING REVETMENT IN LEFT ROADWAY DITCH BETWEEN STA. 8+48 AND STA. 8+96. MATERIAL MAY BE DISPOSED WITHIN THE PROJECT LIMITS AS DIRECTED BY THE ENGINEER. THIS WORK SHALL BE INCLUDED IN AND CONSIDERED INCIDENTAL TO THE PRICE BID FOR THIS ITEM.

100-4A ESTIMATE REFERENCE INFORMATION 10-29-02 Description Item No. Item Code SAFETY CLOSURE 18 2518-6910000 REFER TO TAB. 108-13A. 2602-0000020 22 REFER TO TAB. 100-17. THE TABULATION INCLUDES ESTIMATED LOCATIONS FOR PLACEMENT OF SILT FENCE TO ADDRESS POSSIBLE EROSION DURING CONSTRUCTION. VERIFY THE SPECIFIC LOCATIONS WITH THE ENGINEER PRIOR TO BEGINNING PLACEMENT. BID ITEM INCLUDES 25% ADDITIONAL QUANTITY FOR FIELD ADJUSTMENT AND REPLACEMENTS. SILT FENCE FOR DITCH CHECKS REFER TO TAB. 100-18. THE TABULATION INCLUDES ESTIMATED LOCATIONS FOR PLACEMENT OF "SILT FENCE FOR 2602-0000030 DITCH CHECKS" TO ADDRESS EROSION TO BE ENCOUNTERED DURING CONSTRUCTION. VERIFY THE SPECIFIC

LOCATIONS WITH THE ENGINEER PRIOR TO BEGINNING PLACEMENT. BID ITEM INCLUDES 50% ADDITIONAL QUANTITY FOR

GENERAL NOTES

IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO MAKE ALL NECESSARY ARRANGEMENTS WITH ADJACENT PROPERTY OCCUPANTS FOR RESTRAINING LIVESTOCK FROM ENTERING THE RIGHT-OF-WAY DURING CONSTRUCTION.

CONTRACTOR IS TO USE DUE CAUTION IN WORKING OVER AND AROUND ALL TILE LINES. BREAKS IN THE TILE LINE DUE TO THE CONTRACTOR'S CARELESSNESS ARE TO BE REPLACED AT CONTRACTOR'S EXPENSE WITHOUT COST TO THE CONTRACTING AUTHORITY. ANY TILE LINES BROKEN OR DISTURBED BY CUT LINES WILL BE REPLACED AS DIRECTED BY THE ENGINEER IN CHARGE OF CONSTRUCTION AND AT THE CONTRACTING

WHERE PUBLIC UTILITY FIXTURES ARE SHOWN AS EXISTING ON THE PLANS OR ENCOUNTERED WITHIN THE CONSTRUCTION AREA, IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO NOTIFY THE OWNERS OF THOSE UTILITIES PRIOR TO THE BEGINNING OF ANY CONSTRUCTION. THE CONTRACTOR SHALL AFFORD ACCESS TO THESE FACILITIES FOR NECESSARY MODIFICATION OF SERVICES. UNDERGROUND FACILITIES, STRUCTURES AND UTILITIES HAVE BEEN PLOTTED FROM AVAILABLE SURVEYS AND RECORDS, AND THEREFORE THEIR LOCATIONS MUST BE CONSIDERED APPROXIMATE ONLY. IT IS POSSIBLE THERE MAY BE OTHERS, THE EXISTENCE OF WHICH IS PRESENTLY NOT KNOWN OR SHOWN. IT IS THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THEIR EXISTENCE AND EXACT LOCATION AND TO AVOID DAMAGE THERETO. NO CLAIMS FOR ADDITIONAL COMPENSATION WILL BE ALLOWED TO THE CONTRACTOR FOR ANY INTERFERENCE OR DELAY CAUSED BY SUCH WORK.

CONTRACTOR SHALL NOTIFY ONE-CALL (1-800-292-8989) FOR UTILITY LOCATES PRIOR TO COMMENCING WORK.

FIELD ADJUSTMENTS AND REPLACEMENTS.

SEEDING WILL BE ACCOMPLISHED BY THE COUNTY.

ALL STOCKPILE AREAS, HAUL ROADS, AND AREAS USED FOR EQUIPMENT ON THIS PROJECT REQUIRE SUBSOIL TILLAGE TO AN AVERAGE DEPTH OF 16 TO 20 INCHES PRIOR TO PLACEMENT OF TOPSOIL AND/OR STABILIZING CROP SEEDING. COMPLETE THIS TILLAGE AT 3 FOOT MAXIMUM CENTERS AND AT RIGHT ANGLES TO THE FINISHED SLOPE.

USE TILLAGE EQUIPMENT EQUIPPED WITH AN ARROWHEAD TYPE SHOE THAT WILL PROVIDE LATERAL DISPLACEMENT AND LIMIT THE MOVEMENT OF THE SUBSOIL TO THE SURFACE. OBTAIN THE ENGINEER'S APPROVAL FOR THE EQUIPMENT. THIS WORK IS INCIDENTAL TO OTHER WORK ON THE

FOLLOWING THE SUBSOIL TILLAGE. THE AREA IS TO REMAIN IN A "LOOSENED" CONDITION. ADDITIONAL COMPACTION OR THE OPERATION OF HEAVY EQUIPMENT, OTHER THAN REQUIRED FOR TOPSOIL PLACEMENT AND SHAPING, WILL NOT BE ALLOWED ON AREAS WHICH HAVE BEEN RECEIVED SUBSOIL TILLAGE.

ANY LIVING, DEAD, CUT OR FALLEN MATERIAL OF THE ASH (FRAXINUS SPP.) INCLUDING TREES, NURSERY STOCK, LOGS, FIREWOOD, STUMPS,

ROOTS, BRANCHES, AND COMPOSTED OR UNCOMPOSTED ASH CHIPS CAN BE FREELY MOVED WITHIN THE YELLOW AREAS OF THE MOST RECENT FEDERAL EAB QUARANTINE & AUTHORIZED TRANSIT.

https://www.aphis.usda.gov/plant_health/plant_pest_info/emerald_ash_b/downloads/eab_quarantine_map.pdf.

OBTAIN APPROPRIATE COMPLIANCE AGREEMENTS FROM USDA APHIS PPQ PRIOR TO MOVING ANY OF THE ABOVE LISTED ASH ARTICLES TO AREAS OUTSIDE THE YELLOW ZONE ON THE MAP.

FOR QUESTIONS, CONCERNS, AND GENERAL ASSISTANCE, CONTACT:

USDA APHIS PPQ, IOWA OFFICE, 515-414-3295

IOWA DEPARTMENT OF AGRICULTURE & LAND STEWARDSHIP 515-725-1470

Entomology@lowaAgriculture.gov

A SCRAPE SAMPLE WAS TAKEN FROM ONE AREA OF THIS BRIDGE TO GET AN INDICATION OF THE EXISTENCE OF THE LEVEL OF TOTAL CHROMIUM AND TOTAL LEAD. ANALYSIS OF TOTAL LEAD ON THIS SAMPLE WAS 129000 PARTS PER MILLION (PPM). ANALYSIS OF TOTAL CHROMIUM ON THIS SAMPLE WAS 477 PPM. THESE ANALYSES SHOW THE EXISTENCE OF THESE TWO TOXIC CONSTITUENTS. LEVELS INDICATED BY THESE TESTS COULD CREATE CONDITIONS ABOVE REGULATORY LIMITS FOR HEALTH AND SAFETY REQUIREMENTS. NO OTHER CONSTITUENTS WERE ANALYZED. THE BIDDER SHOULD NOT RELY ON THE CONTRACTING AUTHORITY'S TESTING AND ANALYSIS FOR ANY PURPOSE OTHER THAN AS AN INDICATION OF THE EXISTENCE OF THESE TWO TOXIC CONSTITUENTS.

PRECAST CONCRETE BOX OPTION

THE CULVERT CONTRACTOR MAY SUBSTITUTE PRECAST CONCRETE BOX SECTIONS AND PRECAST CONCRETE HEADWALLS IN PLACE OF THE CONCRETE CAST IN PLACE BARRELS AND HEADWALLS SHOWN ON THE PLANS.

- IF A CONTRACTOR CHOOSES TO SUBSTITUTE PRECAST SECTIONS THE FOLLOWING SHALL APPLY:
- THE CONTRACTOR SHALL FURNISH AND INSTALL PRECAST CONCRETE BOX CULVERTS OF THE SIZE AND LENGTH AS SHOWN IN THE PLANS FOR CAST IN PLACE CONCRETE BOX CULVERTS IN ACCORDANCE WITH SECTION 2415 OF THE STANDARD SPECIFICATIONS.
- THE CONTRACTOR SHALL FURNISH AND INSTALL EYE BOLT TIES ON EACH SIDE OF EACH JOINT. EYE BOLT TIES SHALL BE INSTALLED WITH NUTS ON INSIDE OF BARREL. THE MAIN SECTION JOINTS WILL HAVE ONE TIE ON EACH SIDE OF THE BARREL EXCEPT THE LAST THREE BARREL TO BARREL JOINTS AT EACH END SHALL HAVE TWO TIES PER SIDE WITH THE BOTTOM ROW OF TIES LOCATED 1'-8 ABOVE TOP OF BARREL FLOOR
- THE CONTRACTOR SHALL FURNISH AND INSTALL AN APPROVED BITUMINOUS SEAL MATERIAL FOR EACH JOINT AS PER MATERIALS I.M. 491.09. MATERIAL SHALL BE INSTALLED IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE MANUFACTURER AND SHALL EXTEND VERTICALLY 6 INCHES ABOVE THE BOTTOM FILLET.
- THE CONTRACTOR SHALL FURNISH AND INSTALL A 24" WIDE STRIP OF ENGINEERING FABRIC COMPLETELY AROUND THE TOP AND SIDES OF EACH JOINT WITH A MINIMUM OVERLAP OF 18 INCHES. THE FABRIC SHALL BE CENTERED WITH I FOOT ON EACH SIDE OF THE JOINT. THE FABRIC SHALL BE ATTACHED TO THE WALLS AND TOP OF EACH SECTION TO PREVENT THE FABRIC FROM SLIPPING OFF THE JOINT DURING BACKFILLING OPERATIONS. ATTACHMENT METHODS SHALL BE APPROVED BY THE ENGINEER. THE ENGINEERING FABRIC SHALL MEET THE MATERIAL REQUIREMENTS IN ACCORDANCE WITH ARTICLE 4196.01, B, 3, OF THE STANDARD SPECIFICATIONS.
- E. THE CONTRACTOR SHALL FURNISH AND INSTALL LIFTING HOLE PLUGS FOR EACH SECTION. LIFTING HOLES SHALL BE PLUGGED WITH A PRECAST CONCRETE PLUG, SEALED AND COVERED WITH MASTIC OR MORTAR.
- THE CURTAIN WALL SHALL EXTEND THE SAME DISTANCE BELOW THE CULVERT INVERT AS THE CURTAIN WALL FOR THE CAST IN PLACE BOX SHOWN ON THE PLANS.
- G. SHEET PILE SHALL BE DRIVEN BEHIND CURTAIN WALL TO DEPTH SHOWN IN DETAIL ON PLAN SHEET U1.
- H. GAP BETWEEN ADJACENT BARRELS SHALL BE A NOMINAL 12 INCHES. GAP SHALL BE CENTERED ON CENTERLINE OF CULVERT. REFER TO DETAIL ON PLAN SHEET U1.
- SUBBASE CONFIGURATION SHALL BE THE SAME AS THE DETAILS ON PLAN SHEET UI FOR THE CAST IN PLACE BOX. NO ADJUSTMENTS TO PLAN QUANTITIES WILL BE MADE DUE TO WIDER FOUNDATION NECESSITATED BY PRECAST OPTION.
- A 4 FOOT WIDE STRIP OF ENGINEERING FABRIC SHALL BE PLACED ON TOP OF THE SPECIAL BACKFILL FOUNDATION MATERIAL. THE ENGINEERING FABRIC SHALL MEET THE MATERIAL REQUIREMENTS IN ACCORDANCE WITH ARTICLE 4196.01, B, 3, OF THE STANDARD SPECIFICATIONS. ENGINEERING FABRIC SHALL BE PLACED THE FULL LENGTH OF THE PRECAST CULVERT, INCLUDING END SECTIONS. THE ENGINEERING FABRIC SHALL BE CENTERED OVER THE CENTERLINE OF CULVERT BEFORE THE PRECAST CULVERTS ARE PLACED.
- A 4" DIAMETER SUBDRAIN SHALL TERMINATE AND BE CAPPED AT THE UPSTREAM END 12 INCHES SHORT OF THE END OF THE APRON OF THE END OF SECTION. THE SUBDRAIN SHALL OUTLET DOWNSTREAM AT THE END OF THE APRON OF THE END SECTION. THE SUBDRAIN SHALL BE SURROUNDED BY POROUS BACKFILL IN ACCORDANCE WITH SECTION 4131 OF THE STANDARD SPECIFICATIONS. NO COMPACTION OF THE POROUS BACKFILL IS REQUIRED.
- POROUS BACKFILL SHALL BE PLACED BETWEEN THE PRECAST BARREL WALLS UP TO 8 INCHES FROM THE TOP OF THE BARREL SLABS. POROUS BACKFILL SHALL ALSO BE PLACED BETWEEN THE END SECTIONS UP TO 8 INCHES FROM THE TOP OF THE WALLS AND 16 INCHES SHORT OF THE END OF THE APRON OF THE END SECTION. THE POROUS BACKFILL SHALL BE IN ACCORDANCE WITH SECTION 4131 OF THE STANDARD SPECIFICATIONS.
- M. A CONCRETE CAP SHALL BE PLACED ON TOP OF THE POROUS BACKFILL BETWEEN THE PRECAST CULVERTS FOR A DEPTH OF 8 INCHES FROM THE TOP OF THE BARREL SLABS, THE TOP OF THE END SECTION WALLS, AND TO A 16 INCH DEPTH AT THE ENDS OF THE APRON OF THE END SECTIONS. THE CONCRETE SHALL BE CLASS C CONCRETE IN ACCORDANCE WITH SECTION 2403 OF THE STANDARD SPECIFICATIONS.
- N. LENGTH OF TYPE 1 PARAPETS SHALL BE INCREASED SO THE ADJOINING ENDS WILL ABUT AGAINST EACH OTHER AT THE CENTERLINE OF CULVERT FOR SIDE-BY-SIDE PRECAST CULVERT STRUCTURES.
- O. LENGTH OF TYPE 3 LINTEL BEAMS AND PARAPETS SHALL BE INCREASED SO THE ADJOINING ENDS WILL ABUT AGAINST EACH OTHER AT THE CENTERLINE OF CULVERT FOR SIDE-BY-SIDE PRECAST CULVERT STRUCTURES.
- P. LENGTH OF CURTAIN WALLS SHALL BE SHORTENED SO THE ADJOINING ENDS WILL ABUT AGAINST EACH OTHER AT THE CENTERLINE OF CULVERT FOR SIDE-BY-SIDE PRECAST CULVERT STRUCTURES.

BEFORE BEGINNING CONSTRUCTION THE CONTRACTOR SHALL SUBMIT DETAILS OF THE PROPOSED PRECAST BOX SECTIONS AND HEADWALL TO THE CRAWFORD COUNTY ENGINEER FOR APPROVAL. THE DETAILS SHALL INCLUDE THE FOLLOWING:

- 1. A SITUATION PLAN DRAWING SHOWING THE BACK OF PARAPET DIMENSION FOR THE LINE OF THE CULVERT SECTIONS.
- 2. A DETAIL OF THE PRECAST CULVERT AND HEADWALL SECTIONS SHOWING A CROSS SECTION VIEW OF THE SECTION, STEEL LOCATIONS, DIMENSIONS, ETC.
- 3. A DETAIL OF THE INLET AND OUTLET HEADWALL SHOWING DIMENSIONS AND SLOPES.
- 4. A DETAIL OF THE PARAPET SHOWING A CROSS SECTION WITH DIMENSIONS AND A DETAIL OF HOW IT IS ATTACHED TO THE HEADWALL.
- 5. A DETAIL OF THE CURTAIN WALL SHOWING A CROSS SECTION WITH DIMENSIONS AND A DETAIL OF HOW IT IS ATTACHED TO THE HEADWALL

THE ABOVE DETAILS SHALL BE CERTIFIED BY AN ENGINEER LICENSED IN THE STATE OF IOWA. THE CONTRACTOR SHALL ALLOW SEVEN DAYS FOR THE COUNTY ENGINEER'S REVIEW. FOR CONSTRUCTION OF THE PRECAST ALTERNATE THE CONTRACTOR WILL BE PAID THE PRICES BID FOR THE PLAN QUANTITIES OF "STRUCTURAL CONCRETE (R.C.B. CULVERT)" AND "REINFORCING STEEL".

		STANDARD ROAD PLANS 105-4 10-18-11
	The following	Standard Road Plans apply to construction work on this project.
NUMBER	DATE	TITLE
DR-101	04-18-17	PIPE CULVERT (BEDDING AND BACKFILL)
DR-104	04-19-16	DEPTH OF COVER TABLES FOR CONCRETE AND CORRUGATED PIPE
DR-501	04-21-15	CORRUGATED METAL TYPE "A" DIAPHRAGM
DR-651	04-18-17	UNCLASSIFIED PIPE CULVERT
EC-201	10-17-17	SILT FENCE
EW-101	10-17-17	EMBANKMENT AND REBUILDING EMBANKMENTS
TC-1	04-16-13	WORK NOT AFFECTING TRAFFIC (TWO-LANE OR MULTI-LANE)
TC-252	04-19-16	ROUTES CLOSED TO TRAFFIC

	INDEX OF TABULATIONS								
Tabulation	Tabulation Title	Sheet No.							
100-1A	ESTIMATED PROJECT QUANTITIES	C1							
100-4A	ESTIMATE REFERENCE INFORMATION	C1-2							
100-17	TABULATION OF SILT FENCES	C3							
100-18	TABULATION OF SILT FENCE FOR DITCH CHECKS	C3							
1023	ACCESS POINTS AND SAFETY RAMPS	C3							
104-3	DRAINAGE STRUCTURE BY ROAD CONTRACTOR	C4							
105-4	STANDARD ROAD PLANS	C3							
108-13A	SAFETY CLOSURES	C3							
111-25	INDEX OF TABULATIONS	C3							
	STANDARD BRIDGE PLANS	C3							
	TABULATION OF EARTHWORK QUANTITIES	C3							
	PLACEMENT OF QUANTITIES	C3							

STANDARD	BRIDGE PL	_ANS_
STANDARD	ISSUED	REVISED
TWRCB G1-12	APRIL, 2012	07-16
TWRCB G2-12	APRIL, 2012	12-16
TWRCB 12-12-12	APRIL, 2012	
TWH 0-1-12	APRIL, 2012	12-16
TWH 0-2-12	APRIL, 2012	12-16
TWH 0-3-12	APRIL, 2012	07-16
TWH 0-4-12	APRIL, 2012	
PRCB G1-13	JANUARY, 2013	07-16
PRCB G2-13	JANUARY, 2013	07-16
PRCB 12-13	JANUARY, 2013	
PES 1-13-T1	JANUARY, 2013	07-16
PES 1-13-T3	JANUARY, 2013	07-16
PES 3-13-T3	JANUARY, 2013	07-16
PES 4-13	JANUARY, 2013	
PEP 1-13	JANUARY, 2013	12-15

TABULATION OF SILT FENCES Refer to EC-201											
L	ocation										
Begin Station	End Station	Side	Length	Rema	rks						
3			LF								
6+75	9+65	R	303.0								
6+94	9+50	L	277.0								
SUBTOTAL			660.0								
+25% FOR I	REPLACEMENTS		165.0								
TOTAL			825.0								

TABULATION OF SILT FENCES FOR DITCH CHECKS Refer to EC-201												
Туре	Location Station	Side	Length LF	Remarks								
1	8+75	L	20									
	TOTAL		20	TARIH ATER CHANTITY								
	TOTAL +50%		20 30	TABULATED QUANTITY BID QUANTITY								

ACCESS POINTS AND SAFETY RAMPS Refer to Cross-Sections

102-3 10-15-13

Pipe Culvert 3 Location Туре PR (SR) W A, B, C. Safety Ramp, or Predetermined* Pipe Remarks Size Rt. Side Lt. Station Length ध । FT IN 6+83 9+74 24 20 RT


					TOT41	TOTAL I	
		ADD.	FILL	ADD.	TOTAL	TOTAL	044 4440
STA.	CUT	CUT	+35%	FILL	CUT	FILL+35%	BALANCI
6+75		-					
7+00	4.3		1.3		4.3	1.3	
7+45.26	25.9		239.1		25.9	239.1	
7+72.23	10.8		0.808		10.8	808.0	
7+72.23							
7+86	0		89.8		0	89.8	
8+00	0		90.7		0_	90.7	
8+00							
8+32.18	9.2		870.2		9.2	870.2	
8+50	39.6		126.1		39.6	126.1	
8+75	117.1		68.4		117.1	68.4	
9+00	127.5		57.6		127.5	57.6	
9+50	<u>1</u> 17.7		62.6		117.7	62.6	
		·					
TOTAL					452.1	2413.8	


PLACEMENT OF QUANTITIES													
TWIN 12"x12"x46" RCB_CULVERT													
		CONCRE	TE C.Y.		STEEL								
LOCATION	SLAB	FLOOR	WALLS	TOTAL	LBS.								
INLET HEADWALL, O' SKEW	2.8	57.3	28.1	88.2	10244								
INLET BARREL SECTION, 10'-0	9.4	9.6	12.9	31.9	5480								
BARREL_SECTION, 26'-0	24.5	24.9	33.5	82.9	14248								
OUTLET BARREL SECTION, 10'-0	9.4	9.6	12.9	31.9	5480								
OUTLET HEADWALL, O' SKEW	2.8	57.3	28.1	88.2	10244								
5r1 DOWEL BARS (2 SETS REQ'D @ 95 LBS.)					190								
TOTAL	48.9	158.7	115.5	323.1	45886								
TOTAL	0.5	130.7	112.2	J2J.	+0000								


NOTE: FOR GENERAL INFORMATION, NOTES, SPECIFICATIONS & DESIGN STRESSES REFER TO IOWA D.O.T. HIGHWAY DIVISION STANDARD TWRCB-G1-12.

FOR DETAILS AND NOTES NOT SHOWN REFER TO STANDARD BRIDGE PLANS LISTED ON PLAN SHEET C3.

SAFETY CLOSURES SAFETY CLOSURES Refer to Section 2518 of the Standard Specifications											
	CLOSURE TYPÉ										
STATION	Road Qty.	Hazard Qty.	REMARKS								
6+00	_	1 .	WEST END								
10+00	_	1	EAST_END								
TOTAL			ļ								
TOTAL	<u> </u>	2	<u></u>								

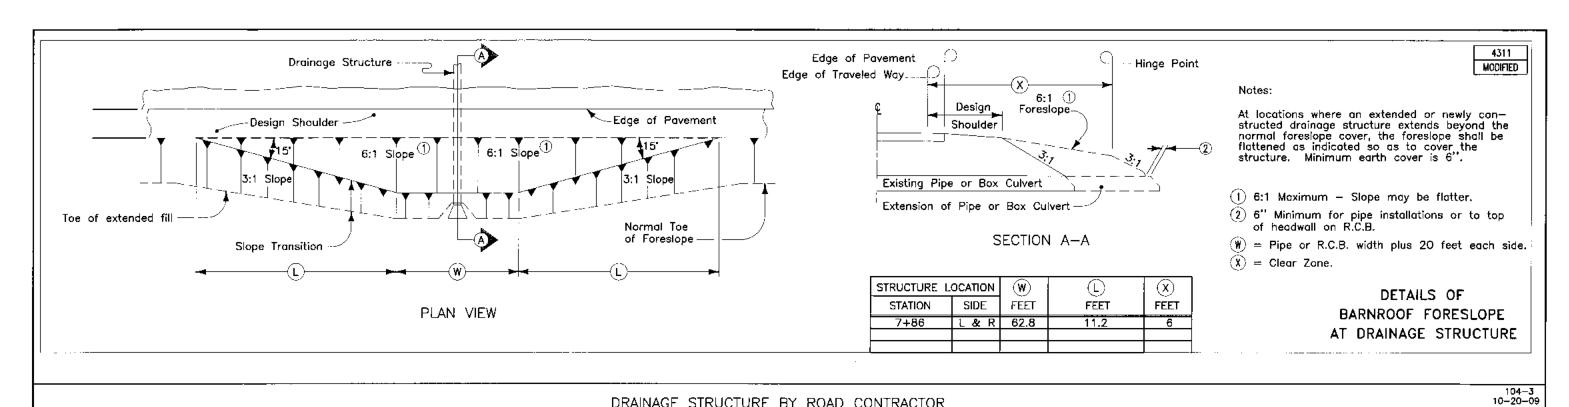

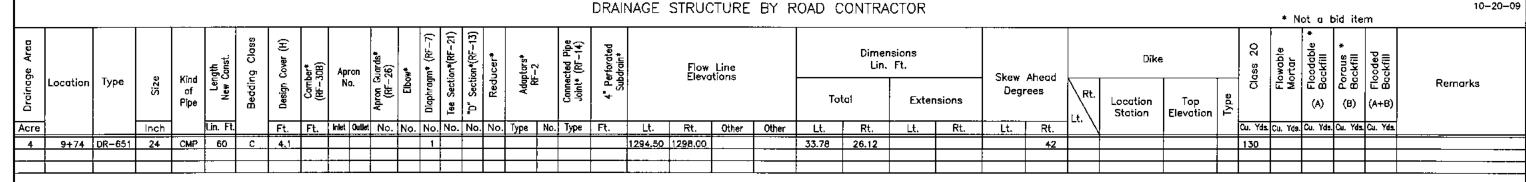

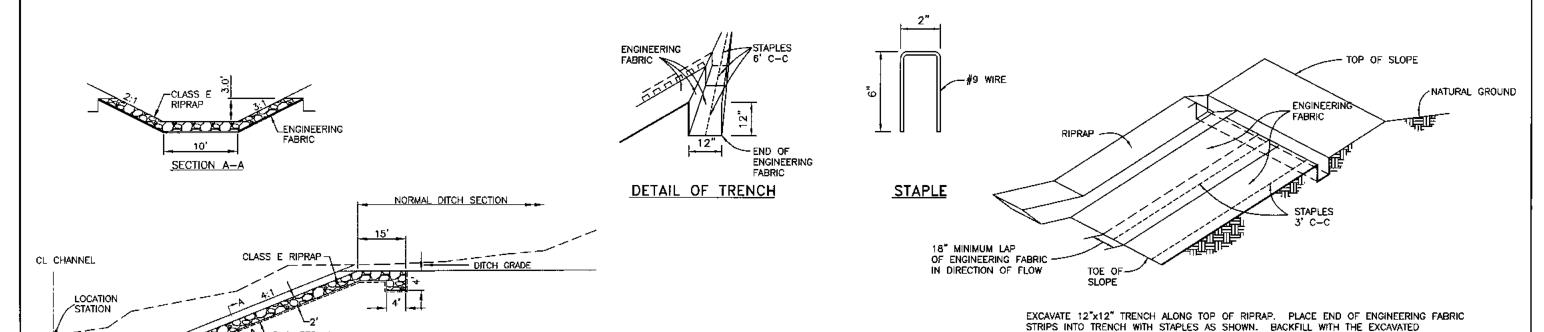

DETAILS OF PLACEMENT OF ENGINEERING FABRIC

MATERIAL AND COMPACT. THE ENGINEER MAY PERMIT THE USE OF THE WHEELS OF PNEUMATIC-TIRED EQUIPMENT FOR CONSOLIDATING THE TRENCH BACKFILL MATERIAL.

NO SCALE

PROJECT NO. BROS-C024(120)--8J-74

LENGINEERING

ROCK FLUME STA. 18+55

POLLUTION PREVENTION PLAN

110-12A 10-18-16

POLLUTION PREVENTION PLAN

110-12A 10-18-16

This project is regulated by the requirements of the lowa Department of Natural Resources (DNR) National Pollutant Discharge Elimination System (NPDES) General Permit No. 2 OR an lowa Department of Natural Resources (DNR) National Pollutant Discharge Elimination System(NPDES) individual storm water permit. The Contractor shall carry out the terms and conditions of this permit and the Pollution Prevention Plan (PPP).

This Base PPP includes information on Roles and Responsibilities, Project Site Description, Controls, Maintenance Procedures, Inspection Requirements, Non-Storm Water Controls, Potential Sources of Off Right-of-Way Pollution, and Definitions. This plan references other documents rather than repeating the information contained in the documents. A copy of this Base Pollution Prevention Plan, amended as needed per plan revisions or by contract modification, will be readily available for review.

All contractors shall conduct their operations in a manner that controls pollutants, minimizes erosion, and prevents sediments from entering waters of the state and leaving the highway right-of-way. The prime contractor shall be responsible for compliance and implementation of the PPP for their entire contract. This responsibility shall be further shared with subcontractors whose work is a source of potential pollution as defined in this PPP.

ROLES AND RESPONSIBILITIES

A. Designer:

- 1. Prepares Base PPP included in the project plan.
- 2. Prepares Notice of Intent (NOI) submitted to lowa DNR.
- 3. Signature authority on the Base PPP and NOI.
- B. Contractor/Subcontractor:
- 1. Affected contractors/subcontractors are co-permittees with the contracting authority and will sign a certification statement adhering to the requirements of the NPDES permit and this PPP plan. Affected contractors/subcontractors are anyone responsible for sediment or erosion controls or involved in land disturbing activities. All co-permittees are legally required under the Cleon Water Act and the lowa Administrative Code to ensure compliance with the terms and conditions of this PPP.
- 2. Submit an Erosion Control Implementation Plan (ECIP) according to Specifications Section 2602 and any additional plan notes.
- Install and maintain appropriate controls.

- Supervise and implement good housekeeping practices.

 Conduct joint required inspections of the site with inspection staff,

 Comply with training and certification requirements of Specifications Section 2502.
- 7. Signature authority on Co-Permittee Certification Statements and storm water inspection reports.
- C. RCE/Inspector:
- 1. Update PPP whenever there is a change in design, construction, operation or maintenance, which has a significant effect on the discharge of pollutants from the project.
- Maintain an up-to-date record that identifies contractors and subcontractors as co-permittees.
- 3. Make these plans available to the DNR upon their request.
- 4. Conduct joint required inspections of the site with the contractor/subcontractor.
- 5. Complete an inspection report after each inspection.
- 6. Signature authority on storm water inspection reports and Notice of Discontinuation (NOD).

- A. This Pollution Prevention Plan (PPP) is for the construction of a Crawford County Twin RCB Culvert on county road G Avenue over Big Creek. B. This PPP covers approximately 2.5 acres with an estimated 2.2 acres being disturbed. The portion of the PPP covered by this contract has 2.2 acres disturbed.
- C. The PPP is located in an area of two soil association (Marshall-Shelby and Monona-Ida-Napier). The estimated weighted average runoff coefficient number for this PPP after completion will be 0.21.
- D. Storm Water Site Map Multiple sources of information comprise the base storm water site map including:
- . Drainage patterns Plan and Profile sheets and Situation plans.
- Proposed Slopes Cross Sections.
- 3. Areas of Soil Disturbance construction limits shown on Plan and Profile sheets. 4. Location of Structural Controls Tabulations on C sheets.
- 5. Locations of Non-structural Controls Tabulations on C sheets.
- Locations of Stabilization Practices generally within construction limits shown on Plan and Profile sheets.
 Surface Waters (including wetlands) Project Location Map and Plan and Profile sheets.
- 3. Locations where starm water is discharged Plan and Profile sheets.
- E. The base site map is amended by contract modifications and progress payments (fieldbook entries) of completed erosion control work. Also, due to project phasing, erosian and sediment controls shown on project plans may not be installed until needed, based on site conditions. For example, sit fence ditch checks will typically not be installed until the ditch has been installed. Installed locations may also be modified from tabulation locations by field staff. Installed locations will be documented by fieldbook entries.
- F. Runoff from this work will flow into Big Creek.

III. CONTROLS

- A. The contractor's ECIP specified in Article 2602.03 for accomplishment of storm water controls should clearly describe the intended sequence of major activities and for each activity define the control measure and the timing during the construction process that the measure will be implemented.
- B. Preserve vegetation in areas not needed for construction.
- C. Sections 2601 and 2602 of the Standard Specifications define requirements to implement erosion and sediment control measures. Actual quantities used and installed locations may vary from the Base PPP and amendment of the plan will be documented via fleidbook entries or by contract modification. Additional erosion and sediment control items may be required as determined by the inspector and/or contractor during storm water monitoring inspections. If the work involved is not applicable to any contract items, the work will be poid for according to Article 1109.03 paragraph
- 1, EROSION AND SEDIMENT CONTROLS
- a. Stabilization Practices
- 1) Site plans will ensure that existing vegetation or natural buffers are preserved where attainable and disturbed portions of the site will be
- 2) Stabilization practices shall be initiated as soon as practicable in portions of the site where construction activities have temporarily or permanently ceased.
- 3) Temporary stabilizing seeding shall be completed as the disturbed areas are constructed. If construction activity is not planned to occur in a disturbed area for at least 21 days, the area shall be stabilized by temporary seeding or mulching within 14 days.
- 4) Permanent and Temporary Stabilization practices to be used for this project are located in the Estimated Project Quantities (100-1A) and Estimate Reference Information (100-4A) located on the C sheets of the plan. Typical drawings detailing construction of the practices to be used on this project are referenced in the Standard Road Plans Tabulation.
- 5) Preservation of existing vegetation within right-of-way or easements will act as vegetative buffer strips.
- 5) Preservation of topsoil: Bid items to be used for this project are located in the Estimated Project Quantities (100-1A) and Estimate Reference Information (100-4A) located on the C sheets of the plan. Additional information may be found in Tabulations in the C or T sheets of the plans or is referenced in Standard Specifications Section 2105.
- 1) Structural practices will be implemented to divert flows from exposed soils and detain or otherwise limit runoff and the discharge of pollutants from exposed areas of the site. Additionally, structural practices may include: silt basins that provide 3600 cubic feet of storage per acre drained or equivalent sediment controls, outlet structures that withdraw water from surface when discharging basins, and controls to direct storm water to vegetated areas.

2) Structural practices to be used for this project are located in the Estimated Project Quantities (100-1A) and Estimate Reference Information (100-4A) located on the C sheets of the plan, as well as all other item specific Tabulations. Typical drawings detailing construction of the devices to be used on this project can be found on the B sheets of the plans or are referenced in the Standard Road Plans Tabulation.

c. Storm Water Management

1) Measures shall be installed during the construction process to control pollutants in storm water discharges that will accur after construction operations have been completed. This may include velocity dissipation devices at discharge locations and along length of cutfall channel as necessary to provide a non-erosion velocity flow from structure to water course. If included with this project, these items are located in the Estimated Project Quantities (100-1A) and Estimate Reference information (100-4A) located on the C sheets of the plan, as well as all other Road Plans Tabulations. Typical drawings detailing construction of the practices to be used on this project are referenced in the Standard Road Plans Tabulations. The installation of these devices may be subject to Section 404 of the Clean Water Act.

2. OTHER CONTROLS

- a. Contractor disposal of unused construction materials and construction material wastes shall comply with applicable state and local waste disposal, sanitary sewer, or septic system regulations. In the event of a conflict with other governmental laws, rules and regulations, the more restrictive laws, rules or regulations shall apply.
- 1) Vehicle Entrances and Exits Construct and maintain entrances and exits to prevent tracking of sediments onto roadways.
- 2) Material Delivery, Storage and Use Implement practices to prevent discharge of construction materials during delivery, storage, and use. 3) Stockpile Management - Install controls to reduce or eliminate pollution of storm water from stockpiles of soil and paying.
- 4) Waste Disposal Do not discharge any materials, including building materials, into waters of the state, except as authorized by a Section
- 5) Spill Prevention and Control Implement procedures to contain and clean-up spills and prevent material discharges to the storm drain system and waters of the state.
- 6) Concrete Residuals and Washout Wastes Designate temporary concrete washout facilities for rinsing out concrete trucks. Provide directions to truck drivers where designated washout facilities are located. Designated washout areas should be located at least 50 feet away from storm drains, streams or other water bodies. Care should be taken to ensure these facilities do not overflow during storm events.
- 7) Concrete Grooving/Grinding Slurry Do not discharge slurry to a waterbody or storm drain. Slurry may be applied on foreslopes or removed from the project.
- 8) Vehicle and Equipment Storage and Maintenance Areas Perform on site fueling and maintenance in accordance with all environment laws such as proper storage of anside fuels and proper disposal of used engine all or other fluids on site. Employ washing practices that prevent contamination of surface and ground water from wash water.

9) Litter Management - Ensure employees properly dispose of litter.

10) Dewatering - Properly treat water to remove suspended sediment before it re—enters a waterbody or discharges off—site. Measures are also to be taken to prevent scour erosion at dewatering discharge point.

3. APPROVED STATE OR LOCAL PLANS

During the course of this construction, it is possible that situations will arise where unknown materials will be encountered. When such situations are encountered, they will be handled according to all federal, state, and local regulations in effect at the time.

V. MAINTENANCE PROCEDURES

The contractor is required to maintain all temporary erosion and sediment control measures in proper working order, including cleaning, repairing, or replacing them throughout the contract period. This shall begin when the features have lost 50% of their capacity.

V. INSPECTION REQUIREMENTS:

- A. Inspections shall be made jointly by the contractor and the contracting authority at least once every seven calendar days. Storm water monitoring inspections will include:
 - Date of the inspection.
 - Summary of the scope of the inspection.
- Name and qualifications of the personnel making the inspection.
- Review erosion and sediment control measures within disturbed areas for the effectiveness in preventing impacts to receiving waters.

Major observations related to the implementation of the PPP.

5. Major observations related to the implementation of the FFF.

7. Identify corrective actions required to maintain or modify erosion and sediment control measures.

B. Include storm water monitoring inspection reports in the Amended PPP. Incorporate any additional erosion and sediment control measures determined as a result of the inspection. Immediately begin corrective actions on all deficiencies found within 3 calendar days of the inspection.

This includes subsurface drains (i.e. longitudinal and standard subdrains) and slope drains. The velocity of the discharge from these features may be controlled by the use of patio blacks, Class A stone, erasion stone or other appropriate materials. This also includes uncontaminated groundwater from dewatering operations, which will be controlled as discussed in Section III of the PPP.

VII. POTENTIAL SOURCES OF OFF RIGHT-OF-WAY (ROW) POLLUTION

Silts, sediment, and other forms of pollution may be transported onto highway right-of-way (ROW) as a result of a starm event. Potential sources of pollution located outside highway ROW are beyond the control of this PPP. Pollution within highway ROW will be conveyed and controlled per this PPP.

- A. Base PPP Initial Pollution Prevention Plan.
- B. Amended PPP May include Plan Revisions or Contract Modifications for new items, storm water monitoring inspection reports, and fieldbook entries made by the inspector.

- C. IDR Inspector's Daily Report this contains the inspector's daily diary and bid item postings.

 D. Controls Methods, practices, or measures to minimize or prevent erosion, control sedimentation, control storm water, or minimize contaminants from other types of waste or materials. Also called Best Management Practices (BMPs).
- E. Signature Authority Representative from Designer, Contractor/Subcontractor, or RCE/Inspector authorized to sign various storm water documents.

CERTIFICATION STATEMENT

I certify under penalty of low that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

rad J. Asson

GENERAL INFORMATION THIS SURVEY IS IN ENGLISH UNITS.

ELEVATION


BENCH MARKS BM#1 STA. 5+87.3, 33.4' RT., RR SPIKE IN PWR. POLE

1303.13


BM#2 STA, 8+72.6, 34.8' RT., RR SPIKE IN PWR. POLE

1301.03


UNLESS NOTED: ALL TIES ARE HORIZONTAL DISTANCES



N1/4 CORNER SEC. 3-84-39 Y=3513996.11 X=4413423.14



CONTROL POINT #3 STA 5+46.60, 1.17 RT. Y=3514026.65 X=4411350.97




CONTROL POINT #4 STA. 10+56.52, 3.04' RT. Y=3514019.16 X=4411860.85

101-16 10-20-09

11																				14 24 44
			Point on Tangent		Begin Spiral			Begin Curve			Simple Curve PI or Master PI of SCS			End Curve			End Spiral			
ll N	ame	Location	Chadian	Coordinate	inates	Station	Coordinates	Station -	Coordinates		Station	Coordinates		Station	Coordinates		Station	Coordinates		
			Station	Y (Northing)	X (Easting)	Station	Y (Northing)	X (Easting)	Station	Y (Northing)	X (Easting)	Station	Y (Northing)	X (Easting)	Station	Y (Northing)	X (Easting)	Station	Y (Northing)	X (Easting)
'G' A	VE.		5+00.00	3514028.33	4411304.39						· ·									
			10+00.00	3514022.82	4411804.36									1,						
										_										
]						!	1 1

DETAILS OF REFERENCE INFORMATION

All References Plumb Distances (unless otherwise noted)

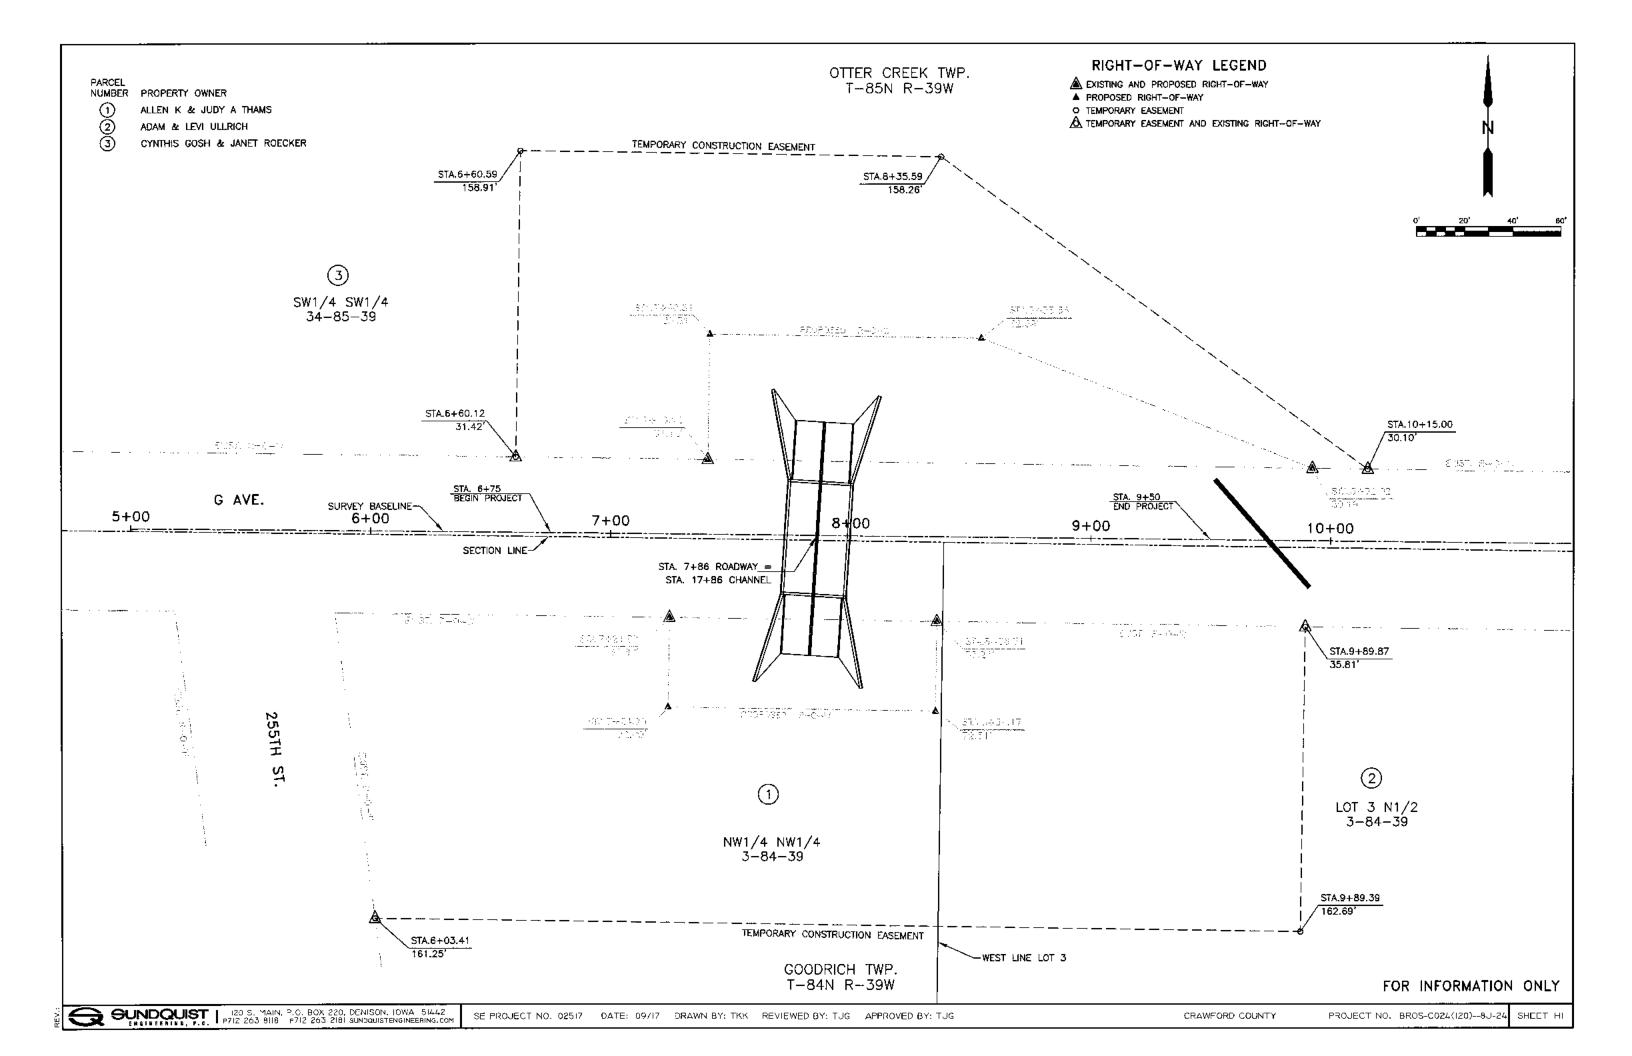

					LOG	OF	EXPLORAT	URY	BORIN(j					Shee	t 1	of	1
	Job Number: G5133S Project: G Avenue Bridge Replacement Date Started: 7/24/17 Date Completed: 7/24/17				Boring No.: B-1 Boring Location: Crawford (Drill Type: Hollow Ste Ground Elev.: 1303.8						•							
Depth in Foot	Graphic Log	Sample Type	Shelby Tube Modified California	Standar Split Split Spli		_	Water Level ATD Water Level After 24 Hours	SDSN	Blow Counts SPT (N) Blows/Foot	Moisture Content, X	Dry Density (PCF)	A Saburation	Hand Penetrometer (TSF)	Unconfined Comp. Strength (TSF)	Liquid Limit 35	Pastic CER X	Plasticity Index 3	Cone Penetrometer
_	XXX	A	16-Inch Gravel	-	Vallani	D			5-4-4	4								
-	₩		FILL, Lean Clay Dry						N= 8									
- 5 -	▓		FILL, Lean Clay,	Dark Brow	n, Moist	to	₩et			26	88	80	2.50					
-		X							1-3-3 N= 6	22								1
- 10 -	▓									27	90	86	1.50					
	▓		7															
- 15 - -		X	SANDY LEAN CLA Alluvium (Gravel)	AY, Dark Gr	oy, Wet,	, Sc	ft,	CL	1-1-2 N= 3	29				:				
- 20 - - - -		X	POORLY GRADED Gravel, Yellow I Medium Dense,	Brown, Wet,			e to	SP- SM	19-17- 33 N= 50									
25 -		X	(Medium Brown)						20-25- 30 N= 55									
- 30 - - - -		X							9-9-8 N= 17									
- 35 -									9-12-14									
- -		X	LEAN CLAY WITH Gray, Wet, Glacio	SAND, Yell al Sediment	ow Gray	/ an	nd	CL	N= 26	18								
- 40 -		X	CLAYEY SAND, G Dense, Glacial S		Wet, Ex	drer	nely	SC	15-41- 45 N= 86									
- 45 -		X	LEAN CLAY WITH Moist, Very Stiff,			Ver	y	CL	8-11-12 N= 23	19	,							
- -			END OF BORING FREE WATER WAS 12.6 FEET AT TI	AT 45 FEE S ENCOUNTI	T Ered at	ſ								,				

		LOG OF EXPLORA	ORY	ORY BORING								Sheet 1 of			
		Job Number:	B: Di	Boring No.: Boring Location: Drill Type: Ground Elev.:				B-2 Crawford County, Hollow Stern 1304.1							
Depth in Feet	Graphic Log Sample Type	Shelby Tube Split Spoon Water Level ATD Shelby Tube Split Spoon Water Level ATD Grab Water Level After 24 Hours SOIL DESCRIPTION	SUSI	Blow Counts SPT (N) Blows/Foot	Moisture Cartent, %	Dry Density (PCF)	X Soturation	Hond Penetrometer (TSF)	Unconfined Comp. Strength (TSF)	Liquid Kmit w	Plostic Uruit X	Plosticity Index 3	Cons Penetrometer		
		8-Inch Gravel Layer FILL, Lean Clay with Sand, Gray Brown,											_		
		Noist to Yery Moist		4-3-4	20	104	89	4.50							
- 5 -				N= 7	20										
		(Dark Brown)			24	94	85	1,00							
· 10 -		(Dark Gray)		1-3-3 N= 6	29								•		
15 -		SANDY LEAN CLAY, Dark Gray, Moist to Wet, Alluvium	CL		17	100	69	4.50							
20 -	X	POORLY GRADED SAND WITH SILT AND GRAVEL, Yellow Brown, Wet, Medium Dense to Very Dense, Alluvium	SP-	2-11-10 N= 21	25										
25 -				7-18-33 N= 51											
30 -	X	LEAN CLAY WITH SAND, Dark Gray, Very Moist, Very Stiff to Hard, Glacial Till	CL	9–13–13 N= 26	20							· · · · · · · · · · · · · · · · · · ·			
35 - - -	X	(Yellow Gray)		6-7-9 N= 16	19										
40 -	\times	(Dark Gray)		9-10-13 N= 23	19										
45 -	X	END OF BORING AT 45 FEET FREE WATER WAS ENCOUNTERED AT 14.4 FEET AT TIME OF DRILLING		15-15- 16 N= 31	19										

SOUNDING DATA

NOTE: THESE SOUNDINGS WERE MADE FOR DESIGN PURPOSES AND ARE NOT GUARANTEED FOR CONSTRUCTION.

SOUNDINGS WERE TAKEN ON JULY 24, 2017.

SEE SHEET V1 FOR BORING LOCATIONS.



I HEREBY CERTIFY THAT THIS ENGINEERING DOCUMENT WAS PREPARED BY ME OR UNDER MY DIRECT PERSONAL SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF IOWA.

MY LICENSE RENEWAL DATE IS DECEMBER 31, 2018. PAGES OR SHEETS COVERED BY THIS SEAL:

SUNDQUIST | 120 S. MAIN, P.O. BOX 220, DENISON, IOWA 51442 P712 263 8119 F712 263 2181 SUNDQUIST ENSINEERING.COM


GEOTECHNICAL INFORMATION PROVIDED HEREWITH IS THE SOLE RESPONSIBILITY OF CERTIFIED TESTING SERVICES, INC., WHOSE GEOTECHNICAL REPORT DATED JULY 31, 2017, COMPLETE WITH THE LICENSED ENGINEER'S SEAL AND CERTIFICATION, IS AVAILABLE FOR VIEWING.


SE PROJECT NO. 02517 DATE: 09/17 DRAWN BY: TKK REVIEWED BY: TJG APPROVED BY: TJG

CRAWFORD COUNTY

PROJECT NO. BROS-C024(120)--8J-24

SHEET QI

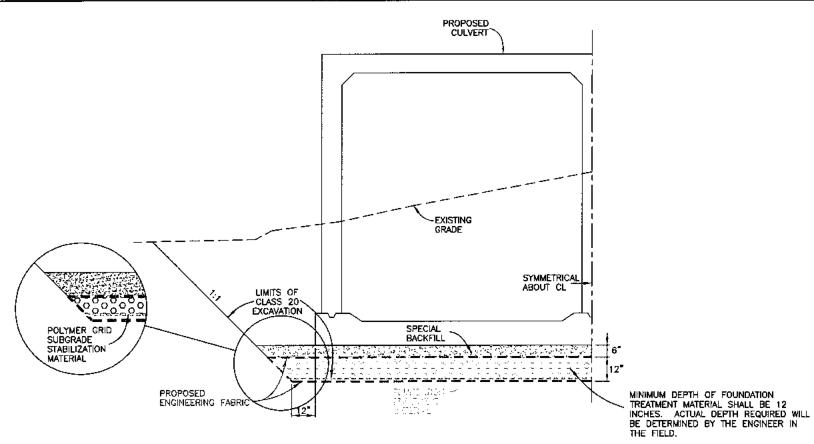


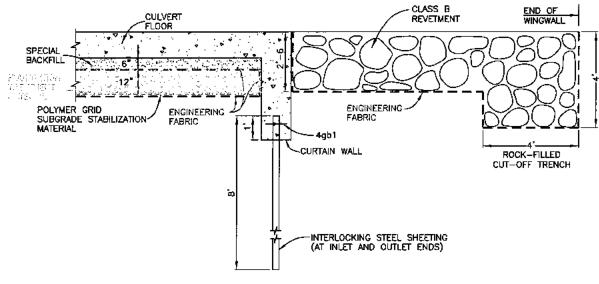


SECTION AT HEADWALL CURTAIN WALL NOT TO SCALE


NOTE:
A HOLE LOCATED 3 INCHES DOWN FROM THE TOP AND ON THE VERTICAL CENTERLINE OF THE STEEL
SHEETING IS TO BE PUNCHED OR FIELD CUT IN EACH PIECE OF SHEETING AND IS TO BE LARGE
ENOUGH TO ACCOMMODATE A 4gb1 BAR. LENGTH OF 4gb1 BARS SHALL BE 11 INCHES. THIS WORK
TO BE INCLUDED IN AND CONSIDERED INCIDENTAL TO THE PRICE BID FOR PILES, STEEL SHEET.


CLASS 20 EXCAVATION & FOUNDATION TYPICAL SECTION

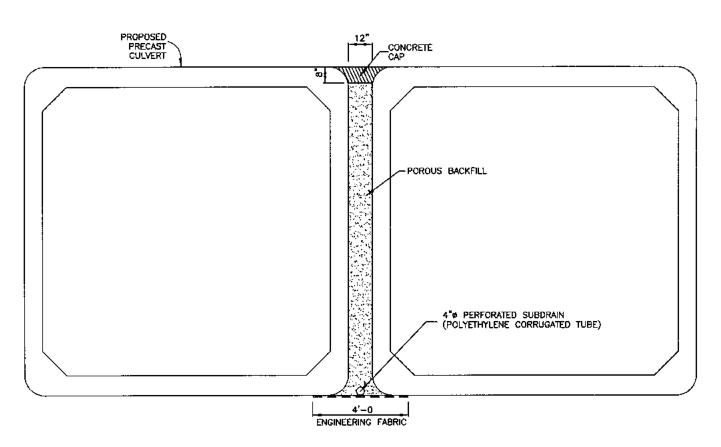





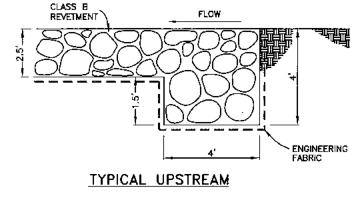



ROCK-FILLED CUTOFF TRENCH DETAILS

NOT TO SCALE

TYPICAL DOWNSTREAM

